



MOLDED PRODUCTS

Pigtail Strain Relief Bushings


For Round Cables, With Integral Nylon Spring

Standard color is black.

Protect the line of your electric/electronic products by absorbing forces of pull, push, twist and FLEX.

Molded of type 6/6 nylon. ASTM D-4066; flammability classification 94V-2.


Integral nylon spring eases the cable into a lazy bend, prevents sharp bending and assures longest cable and product life.



Will fit these cables								
UL Type Designation	AWG/Conductors	Approx Dia. In.	Mounting Hole Dia.	Max Thickness In.	Length	Part Number	UL, CSA Description	Price per 100
SV & SVT	18/2	.250	.500	.062	1-63/64	1590	SR 5N-7	\$ 15.74 C
	18/3	.255	.500-.515					
HPD	18/2	.270	.500	.125		1593	SR5P-7	15.74 C
	16/2	.290	.500-.515					
SJ, SJO SJT	18/2	.300	.625	.062		1596	SR 6N-7	19.63 C
	16/2	.315	.625					
SJ, SJO &SJT	18/3	.320	.625	.062	2-7/64	1599	SR 6N3-7	19.63 C
	14/2	.350						
	16/3	.355						
	18/4	.360						
SJT	18/4	.360	.750	.125		1611	SR 7P-7	29.62 C
	14/3	.370						
S & ST	18/2	.390						
	18/3	.405						
	16/2	.405						
16/3	.430							

Straight-Thru Strain Relief Bushings

For Flat Cables

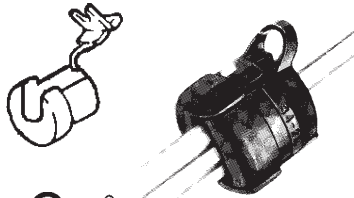

Standard color is black.

Will fit these cables								
UL Type Designation	AWG/Conductors	Approx Size	Mounting Hole Dia.	Max Thickness In.	Part Number	UL, CSA Description	Price per 100	
CLOCK	20/2	.09x18	.375	.062	1017	SR 2P-4	\$ 3.06 C	
SPT-1	18/2	.11x.21						
CLOCK	20/2	.09x18	.375	.125	1034	SR 2L-1	3.06 C	
SPT-1	18/2	.12x.22	.437	.040	1074	SR 3A-4	3.06 C	
SPT-1	18/2	.12x.22	.437	.062	1077	SR 3P-4	3.06 C	
SPT-1	18/2	.12x.22	.437	.156	1094	SR 3L-1	3.06 C	
SPT-1	18/2	.12x.22	.500	.100	1130	SR 4P-4	3.16 C	
SPT-1	18/3	.12x.30	.500	.062	1120	SR 4N-4	3.16 C	
&NPN	18/2	.15x.28						
SPT-1	18/3	.12x.30	.500	.100	1117	SR 4K-4	3.16 C	
&HPN	18/2	.15x.28						
SPT-1	18/3	.12x.30	.500	.156	1127	SR 4L-4	3.16 C	
&HPN	18/2	.15x.28						
SPT-1	18/3	.12x.30						
SPT-2	18/2	.15x.28	.500	.095	1114	SR 4K-1	3.16 C	
&HPN	18/3	.15x.34	.500-					
HPN	16/2	.16x.30	.515					

Will fit these cables				UL	SR	DPE		
UL Type Designation	AWG/Conductors	Approx Size	Mounting Hole Dia.	Max Thickness In.	Part Number	UL, CSA Description	Price per 100	
SPT-1	18/3	.12x.30						
SPT-2 & HPN	18/2	.15x.28	.500	.187	1124	SR 4L-1	\$ 3.16 C	
HPN	18/3	.15x.34	.500-					
SPT-2 & HPN	16/2	.16X.30	.515					
SPT-3	18/2	.19X.35	.562	.062	1170	SR 5KN-4	4.48 C	
SPT-2	16/2	.20X.37						
SPT-2	18/3	.15X.40						
SPT-2	16/3	.16X.41						
Same as SR 5KN-4 above except				.125	1167	SR 5K-4	4.48 C	
HPN & SPT-2	16/3	.16x.37	.562	.125	1174	SR 5W-1	4.48 C	
	18/3	.15x.40						
	16/3	.16x.41						
SPT-2	18/3	.15x.40	.560	.125	1484	SR 30-1	3.16 C	
SPT-3	18/3	.19x.39						
	16/2	.20x.37						
	16/3	.20x.43						
SPT-3	14/2	.24x.42	.875	.125	1517	SR 34-2	9.02 C	
	14/3	.24x.51						
	12/2	.29x.51						
	12/3	.29x.65						
SPT-3	12/3	.32x.65	.875	.125	1497	SR 31-2	9.02 C	
	10/3							

For Round Cables

AWM		.125-.187	.375	.062	1060	SR 2M-1	3.06 C	
SV & SVT	18/2	.220-.245	.500	.062	1157	SR 5MN-3	3.16 C	
Same as SR 5MN-3 above except				.100	1140	SR 5M-3	3.16 C	
SV & SVT	18/2	.250	.500	.062	1150	SR 5N-4	3.16 C	
	18/3	.255	.500-.515					
HPD	18/2	.270	.500-.515					
	16/2	.290	.515					
Same as SR 5N-4 above except				.100	1147	SR5P-4	3.16 C	
				.156	1154	SR 5L-1	3.16 C	
SV & SVT	18/3	.255	.500	.100	1137	SR 5P3-4	3.16 C	
HPD	16/2	.290						
SJ, SJT & SJO	18/2	.300	.500	.090	1184	SR 6W-1	3.16 C	
			.625	.062	1217	SR 6N-4	5.22 C	
Same as SR 6N-4 above except				.125	1210	SR 6P-4	5.22 C	
SJ, SJT & SJO	16/2	.325	.625	.062	1200	SR 6N3-4	5.22 C	
	18/3	.330						
	14/2	.350						
	16/3	.355						
	18/4	.360						
Same as SR 6N3-4 above except				.125	1207	SR 6P3-4	5.22 C	
SJ, SJT & SJO	16/2	.300	.625	.156	1214	SR 6L-1	5.75 C	
	18/3	.330	.656					
	16/3	.355	.687					
SJ, SJT & SJO	16/2	.325	.875	.125	1240	SR 7K-2	9.02 C	
	18/3	.330						
	14/2	.350						
	16/3	.355						
	18/4	.360						
SJT	18/4	.360	.750	.062	1244	SR 7N-2	7.63 C	
	14/3	.370						
S & ST	18/2	.390						
	18/3	.405						
	16/2	.405						
	16/3	.430						
Same as SR 7N-2 above except				.125	1237	SR 7P-2	7.63 C	
SJT	14/3	.370	.875	.125	1247	SR 7W-2	9.02 C	
	12/3	.425						
S & ST	18/2	.390						
	18/3	.405						
	16/2	.405						
	16/3	.430						